


DIN28011, EN 10253

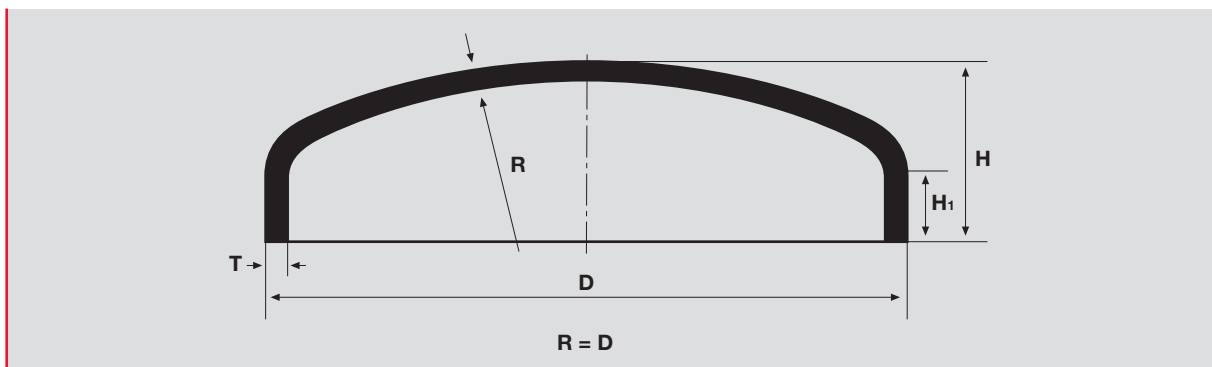

code	DN	D	T	H ₁	H	kg	marking	Tolerance D
EC02102304L	15	21,3	2	10	13	0,015	21.3/2	± 0,5 mm
EC02501316L	20	25	1,5	8	12	0,014	25/1.5	± 0,5 mm
EC02602316L	20	26,9	2	12	16	0,140	26.9/2	± 0,5 mm
EC02801316L	25	28	1,5	6	11	0,014	28/1.5	± 0,5 mm
EC03001304L	25	30	1,5	8	13	0,017	30/1.5	± 0,5 mm
EC03103316L	25	31	3	8	13	0,038	31/3	± 0,5 mm
EC03301304L	25	33	1,5	7	12	0,019	33/1.5	± 0,5 mm
EC033024571	25	33,7	2	6	13	0,025	33.7/2	± 0,5 mm
EC033034571	25	33,7	3	8	13	0,038	33.7/3	± 0,5 mm
EC03801316L	32	38	1,5	12	19	0,032	38/1.5	± 0,5 mm
EC038024571	32	38	2	13	19	0,042	38/2	± 0,5 mm
EC038034571	32	38	3	13	19	0,101	38/3	± 0,5 mm
EC040024571	32	40	2	10	17	0,042	40/2	± 0,5 mm
EC042024571	32	42,4	2	10	17	0,042	42.4/2	± 0,5 mm
EC042034571	32	42,4	3	9	16	0,063	42.4/3	± 0,5 mm
EC04301316L	40	43	1,5	8	16	0,032	43/1.5	± 0,5 mm
EC044024571	40	44,5	2	7	15	0,042	44.5/2	± 0,5 mm
EC046034571	40	46,5	3	7	15	0,063	46,5/3	± 0,5 mm
EC048024571	40	48,3	2	12	20	0,058	48.3/2	± 0,5 mm
EC048034571	40	48,3	3	12	20	0,087	48.3/3	± 0,5 mm
EC05001304L	50	50,8	1,5	9	18	0,044	50.8/1.5	± 1,0 mm
EC051024571	50	50,8	2	9	18	0,058	51/2	± 1,0 mm

DIN28011, EN 10253

code	DN	D	T	H ₁	H	kg	marking	Tolerance D
EC05301304L	50	53	1,5	7	17	0,044	53/1.5	± 1,0 mm
EC054024571	50	54	2	7	17	0,058	54/2	± 1,0 mm
EC056034571	50	56	3	8	17	0,087	56/3	± 1,0 mm
EC06002304L	50	60,3	2	8	19	0,078	60.3/2	± 1,0 mm
EC060034571	50	60,3	3	10	20	0,118	60.3/3	± 1,0 mm
EC06301304L	50	63	1,5	6	18	0,059	63/1.5	± 1,0 mm
EC06402316L	50	64	2	6	17	0,078	64/2	± 1,0 mm
EC07002304L	65	70	2	7	20	0,093	70/2	± 1,0 mm
EC070034571	65	70	3	8	20	0,212	70/3	± 1,0 mm
EC07103304L	65	71	3	9	21	0,212	71/3	± 1,0 mm
EC07301316L	65	73	1,5	6	19	0,098	73/1.5	± 1,0 mm
EC07601304L	65	76	1,5	12	26	0,098	76/1.5	± 1,0 mm
EC076024571	65	76,1	2	12	26	0,131	76.1/2	± 1,0 mm
EC07603304L	65	76,1	3	14	27	0,196	76.1/3	± 1,0 mm
EC084024571	80	84	2	9	22	0,139	84/2	± 1,0 mm
EC08603304L	80	86	3	19	34	0,262	86/3	± 1,0 mm
EC088024571	80	88,9	2	13	29	0,175	88.9/2	± 1,0 mm
EC08803304L	80	88,9	3	15	31	0,262	88.9/3	± 1,0 mm
EC102024571	100	102	2	13	32	0,219	102/2	± 1,0 mm
EC10203304L	100	102	3	15	33	0,329	102/3	± 1,0 mm
EC10402304L	100	104	2	11	30	0,219	104/2	± 1,0 mm
EC106034571	100	106	3	13	32	0,328	106/3	± 1,0 mm
EC11402304L	100	114,3	2	7	28	0,243	114.3/2	± 1,0 mm
EC114034571	100	114,3	3	10	31	0,364	114.3/3	± 1,0 mm
EC12902304L	125	129	2	10	34	0,318	129/2	± 1,0 mm
EC131034571	125	131	3	12	36	0,477	131/3	± 1,0 mm
EC13902304L	125	139,7	2	9	35	0,350	139.7/2	± 1,0 mm
EC139034571	125	139,7	3	10	36	0,526	139.7/3	± 1,0 mm
EC15402304L	150	154	2	11	40	0,449	154/2	± 1,0 mm
EC156034571	150	156	3	11	40	0,673	156/3	± 1,0 mm
EC16802304L	150	168,3	2	10	49	0,513	168.3/2	± 1,0 mm
EC168034571	150	168,3	3	14	49	0,769	168.3/3	± 1,0 mm
EC20402304L	200	204	2	8	47	0,718	204/2	± 1,0 mm

DIN28011, EN 10253

code	DN	D	T	H ₁	H	kg	marking	Tolerance D
EC206034571	200	206	3	9	47	1,077	206/3	± 1,0 mm
EC21902304L	200	219,1	2	13	54	0,862	219.1/2	± 1,0 mm
EC219034571	200	219,1	3	13	54	1,294	219.1/3	± 1,0 mm
EC25402304L	250	254	2	7	55	1,207	254/2	± 1,0 mm
EC256034571	250	256	3	18	66	1,811	256/3	± 1,0 mm
EC27302304L	250	273	2	13	65	1,327	273/2	± 1,0 mm
EC273034571	250	273	3	17	68	1,991	273/3	± 1,0 mm
EC30402304L	300	304	2	8	66	1,674	304/2	± 2,0 mm
EC306034571	300	306	3	17	75	2,511	306/3	± 2,0 mm
EC32302304L	300	323,9	2	10	72	1,911	323.9/2	± 2,0 mm
EC323034571	300	323,9	3	22	83	2,867	323.9/3	± 2,0 mm
EC35402304L	350	354	2	9	77	2,890	354/2	± 2,0 mm
EC356034571	350	356	3	11	79	3,170	356/3	± 2,0 mm
EC40603304L	400	406	3	11	88	4,416	406/3	± 3,0 mm
EC408044571	400	408	4	15	92	8,000	408/4	± 3,0 mm
EC45603304L	450	456	3	12	99	4,810	456/3	± 3,0 mm
EC506034571	500	506	3	11	108	5,910	506/3	± 3,0 mm
EC508044571	500	508	4	16	112	6,490	508/4	± 3,0 mm