


PRESSED BLIND FLANGES

brides cegues

bridas ciegas

EN10253 (DIN2527)

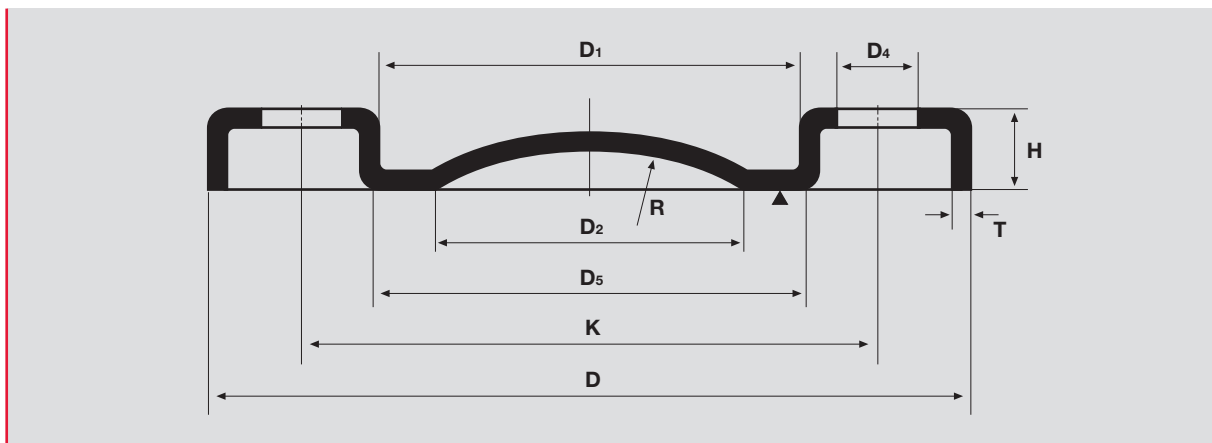

code	DN	D	D ₁	D ₂	D ₅	H	T	D ₄	K	holes	kg	marking	Tolerance D ₂
BZ01503304L	15	95	38	22	40	9,5	3	13,5	65	4	0,19	DN15	± 0,0 mm
BZ02003316L	20	105	48	28	48	12,5	3	13,5	75	4	0,25	DN20	± 0,0 mm
BZ02503304L	25	115	53	35	55	13	3	13,5	85	4	0,32	DN25	± 0,0 mm
BZ03203316L	32	140	68	45	65	14,5	3	17,5	100	4	0,46	DN32	± 1,0 mm
BZ04004304L	40	150	77	54	74	15,5	4	17,5	110	4	0,67	DN40	± 1,0 mm
BZ05004316L	50	165	91	68	88	17	4	17,5	125	4	0,84	DN50	± 1,0 mm
BZ06504304L	65	185	108	84	104	18	4	17,5	145	4	1,05	DN65	± 1,0 mm
BZ08005316L	80	200	123	98	118	18,5	5	17,5	160	8	1,47	DN80	± 1,0 mm
BZ10006304L	100	220	141	117	137	20,5	6	17,5	180	8	2,08	DN100	± 1,0 mm
BZ12506316L	125	250	168	141	161	21	6	17,5	210	8	2,70	DN125	± 1,0 mm
BZ15006304L	150	285	192	174,5	194,5	27	6	21,5	240	8	0,00	DN150	± 1,0 mm
BZ20008316L	200	340	245	226,5	246,5	31	8	21,5	295	8	6,55	DN200	± 1,0 mm