


pressed loose flanges

brides premsades

bridas prensadas

EN 10253 (DIN2642), ISO TUBE, PN16/200°C

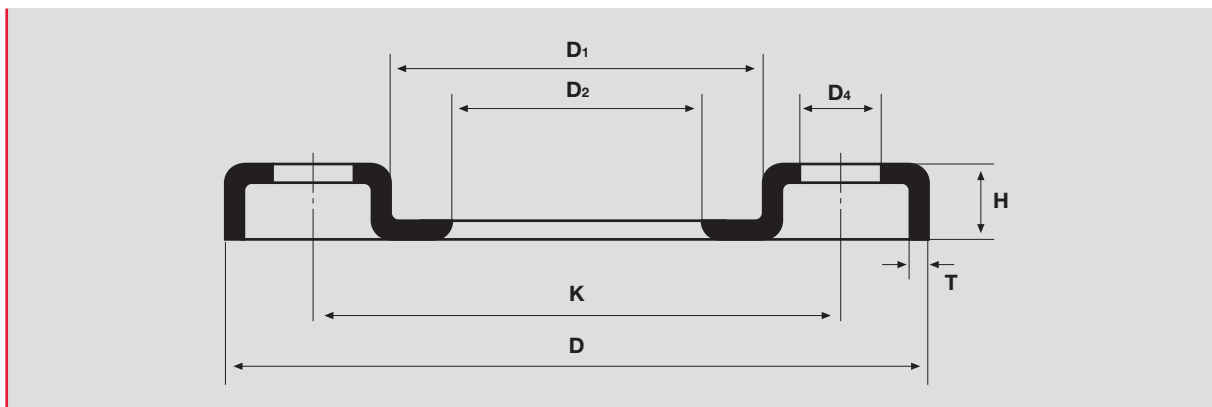

code	DN	recom. collar	D	D ₁	D ₂	H	T	K	D ₄	kg	holes	marking	Tolerance D ₂
BI01503304	15	21,3	95	38	24,5	11,5	3	65	13,5	0,193	4	DN15	± 0,5 mm
BI02003304	20	26,9	105	48	30,5	14	3	75	13,5	0,255	4	DN20	± 0,5 mm
BI02503304	25	33,7	115	53	37,5	16	3	85	13,5	0,319	4	DN25	± 0,5 mm
BI03203304	32	42,4	140	68	47	16,5	3	100	17,5	0,463	4	DN32	± 1,0 mm
BI04004316	40	48,3	150	77	55	17,5	4	110	17,5	0,658	4	DN40	± 1,0 mm
BI05004316	50	60,3	165	91	66	19,5	4	125	17,5	0,807	4	DN50	± 1,0 mm
BI06504316	65	76,1	185	108	82	21	4	145	17,5	1,012	4	DN65	± 1,0 mm
BI08005316	80	88,9	200	123	95	22	5	160	17,5	1,355	8	DN80	± 1,0 mm
BI10006316	100	114,3	220	141	120	23	6	180	17,5	1,779	8	DN100	± 1,0 mm
BI12506316	125	139,7	250	168	146	25	6	210	17,5	2,200	8	DN125	± 1,0 mm
BI15006316	150	168,3	285	192	174,5	27	6	240	21,5	2,798	8	DN150	± 1,5 mm
BI20008316	200	219,1	340	245	226,5	31	8	295	21,5	4,609	8	DN200	± 1,5 mm
BI25008316	250	273	395	295	280,5	34	8	350	21,5	6,209	12	DN250	± 1,5 mm
BI30008316	300	323,9	445	345	330,5	38	8	400	21,5	7,732	12	DN300	± 1,5 mm