


pressed loose flanges

brides premsades

bridas prensadas

EN 10253 (DIN2642), METRIC TUBE, PN16/200°C

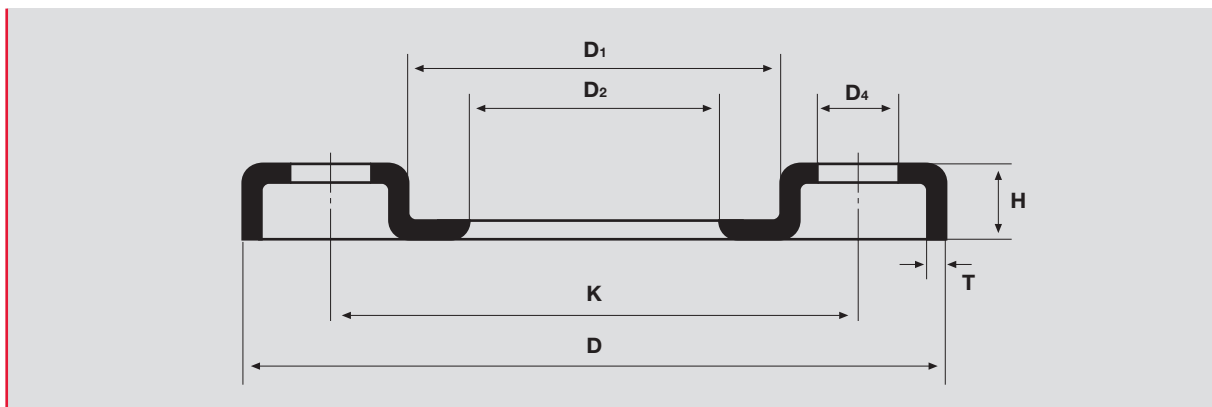

code	DN	recom. collar	D	D ₁	D ₂	H	T	K	D ₄	kg	holes	marking	Tolerance D ₂
BM01503304	15	21	95	38	24	11,5	3	65	13,5	0,193	4	DN15/24	± 0,5 mm
BM02003316	20	26	105	48	30	14	3	75	13,5	0,255	4	DN20/30	± 0,5 mm
BM02503304	25	31	115	53	34	16	3	85	13,5	0,319	4	DN25/34	± 0,5 mm
BM03203316	32	38	140	68	40	16,5	3	100	17,5	0,463	4	DN32/40	± 1,0 mm
BM04004304	40	46	150	77	48	17,5	4	110	17,5	0,658	4	DN40/48	± 1,0 mm
BM05004316	50	56	165	91	58	19,5	4	125	17,5	0,807	4	DN50/58	± 1,0 mm
BM06504304	65	71	185	108	73	21	4	145	17,5	1,012	4	DN65/73	± 1,0 mm
BM08005316	80	86	200	123	90	22	5	160	17,5	1,355	8	DN80/90	± 1,0 mm
BM10006304	100	106	220	141	110	23	6	180	17,5	1,779	8	DN100/110	± 1,0 mm
BM12506316	125	131	250	168	135	25	6	210	17,5	2,200	8	DN125/135	± 1,0 mm
BM15006304	150	156	285	192	160	27	7	240	21,5	3,121	8	DN150/160	± 1,5 mm
BM20008316	200	206	340	245	212	31	8	295	21,5	4,609	8	DN200/212	± 1,5 mm
BM25008304	250	256	395	295	262	34	8	350	21,5	6,209	12	DN250/262	± 1,5 mm
BM30008316	300	306	445	345	312	38	8	400	21,5	7,732	12	DN300/312	± 1,5 mm