


welding neck flanges

brides amb coll

bridas con cuello

EN 10253 (DIN 2633), ISO TUBE, PN16/200°C

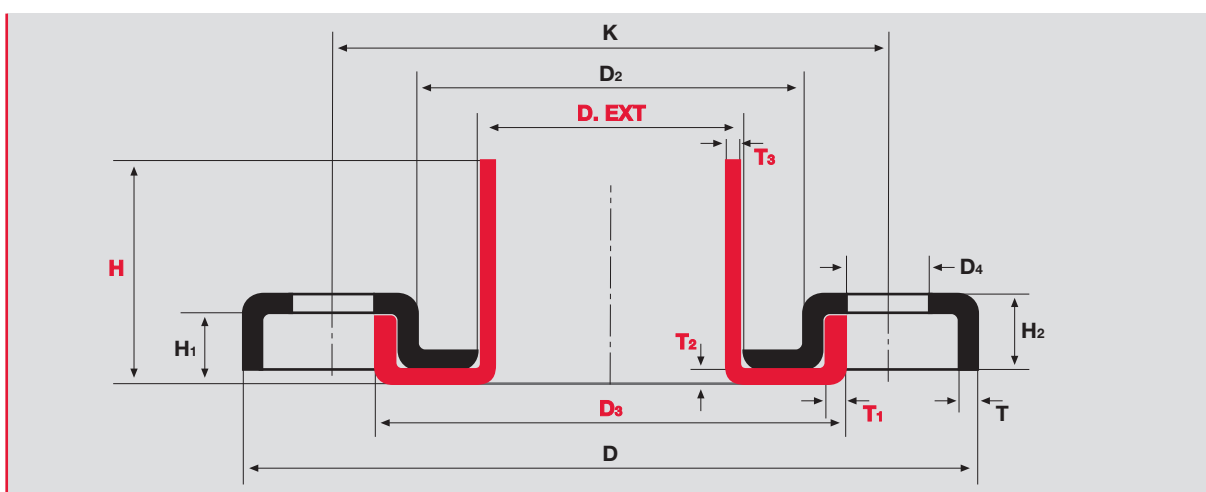

									kg	marking	Tolerance D.Ext
IB04003304L											
inner part	D.EXT 48,3	D ₃ 92	T ₁ 3	T ₂ 2,5	T ₃ 2	H 42	H ₁ 16				
outside flange	D 150	D ₂ 48	H ₂ 17,5	T 4	K 110	D ₄ 17,5	holes 4	1,82	DN 40	± 0,3 mm	
IB05003304L											
inner part	D.EXT 60,3	D ₃ 107	T ₁ 3	T ₂ 2,5	T ₃ 2	H 45	H ₁ 18				
outside flange	D 165	D ₂ 58	H ₂ 19,5	T 4	K 125	D ₄ 17,5	holes 4	2,3	DN 50	± 0,3 mm	
IB06504304L											
inner part	D.EXT 76,1	D ₃ 127	T ₁ 4	T ₂ 3,5	T ₃ 2,8	H 45	H ₁ 20,5				
outside flange	D 185	D ₂ 73	H ₂ 21	T 4	K 145	D ₄ 17,5	holes 4	3,3	DN 65	± 0,3 mm	
IB08003304L											
inner part	D.EXT 88,9	D ₃ 142	T ₁ 4	T ₂ 3,5	T ₃ 2,8	H 50	H ₁ 20,5				
outside flange	D 200	D ₂ 90	H ₂ 22	T 5	K 160	D ₄ 17,5	holes 8	4,22	DN 80	± 0,4 mm	
IB10004304L											
inner part	D.EXT 114,3	D ₃ 162	T ₁ 4	T ₂ 3,5	T ₃ 2,8	H 52	H ₁ 20,5				
outside flange	D 220	D ₂ 110	H ₂ 23	T 6	K 180	D ₄ 17,5	holes 8	1,78	DN100	± 0,5 mm	
IB12504316L											
inner part	D.EXT 139,7	D ₃ 195	T ₁ 4	T ₂ 3,5	T ₃ 3	H 55	H ₁ 22,5				
outside flange	D 250	D ₂ 135	H ₂ 25	T 6	K 210	D ₄ 17,5	holes 8	10,69	DN125	± 0,7 mm	
IB15004304L											
inner part	D.EXT 168,3	D ₃ 218	T ₁ 4	T ₂ 3,5	T ₃ 3,2	H 55	H ₁ 23,5				
outside flange	D 285	D ₂ 160	H ₂ 27	T 7	K 240	D ₄ 21,5	holes 8	9,32	DN150	± 0,8 mm	
IB20005316L											
inner part	D.EXT 219,1	D ₃ 273	T ₁ 5	T ₂ 4,5	T ₃ 3,2	H 62	H ₁ 27,5				
outside flange	D 340	D ₂ 212	H ₂ 31	T 8	K 0	D ₄ 21,5	holes 8	15,15	DN200	± 1,0 mm	